



CITY OF DULUTH
PURCHASING DIVISION
Room 100 City Hall
411 West First Street
Duluth, Minnesota 55802-1199
218/730-5340 218/730-5922 FAX
purchasing@duluthmn.gov


Addendum #1
File # 16-0307
Demolition and Install of Generator

This addendum serves to notify all bidders of the following changes to the solicitation documents:

- 1) Revise section 3 subsection 4.ii in the statement of work to indicate: Contractor shall be responsible for the removal and disposal of the existing 1000 KVA transformer. Prior to disposal contractor shall coordinate with MN Power if they would prefer to salvage the transformer.
- 2) The size and weight of the purchased generator is: Generator 216"L x 74"W x 110"H, Enclosure 20'L x 7'W x 9'-2"H, Tank 20'L x 7'W x 3'-7"H. Weight: 35,000 lbs.
- 3) The Temporary Generator shall power (1) 15 HP 240/3 -36 amp air compressor, (2) O2 sensor control panels – with a total of (2) 15 amp and (3) 20 amp breakers, (1) burner control panel – with (6) 15 amp breakers –and (1) control circuit with (1) 30 Amp breaker. Depending on boiler load the number operating boilers will change the required connected controls. The location of the breakers and air compressor are located on the attached sketch.

Please acknowledge receipt of this Addendum by signing the bid form in the bid packet. Thank you.

Posted April 1st, 2016.

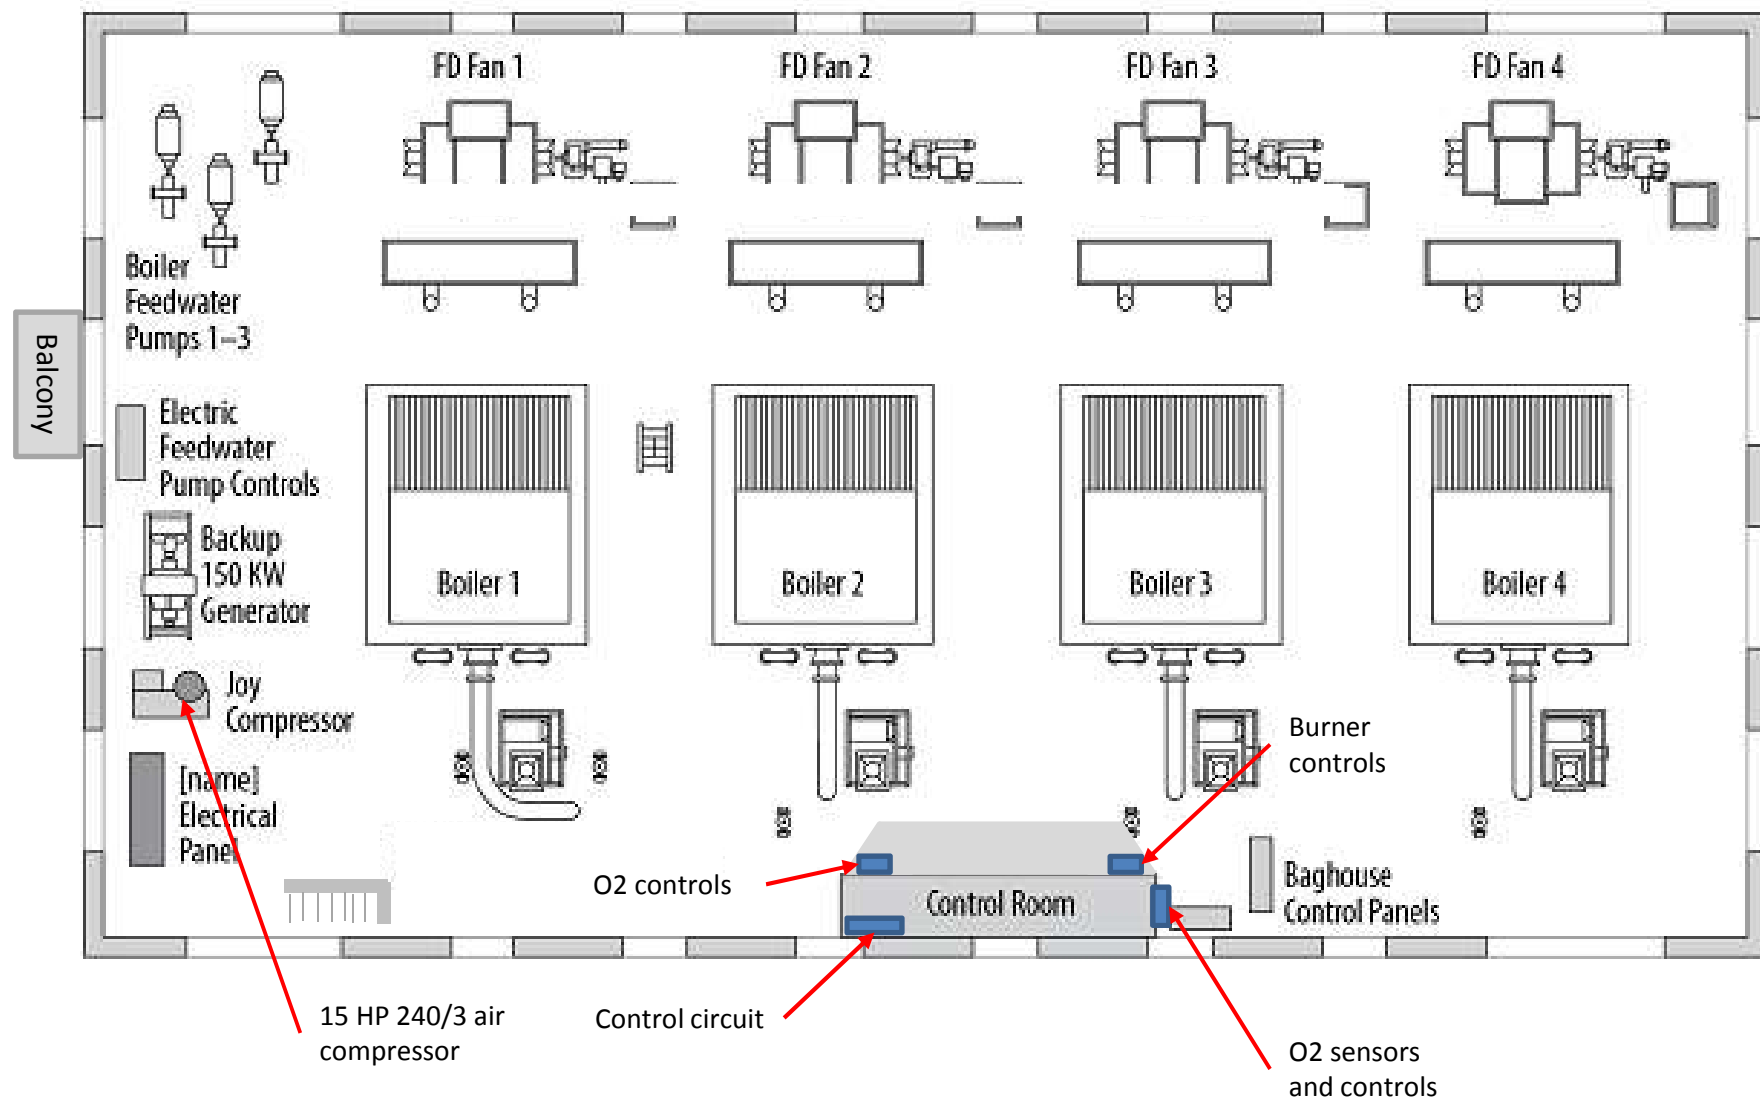

Temporary generator tie-in requirements