



Purchasing Division
Finance Department
Room 120
411 West First Street
Duluth, Minnesota 55802

218-730-5340
purchasing@duluthmn.gov

Addendum #1
Solicitation #25-99213
2025 Citywide Patch and Sidewalk

This addendum serves to notify all bidders of the following changes to the solicitation documents:

1. Please insert Appendix C Rail Crossing Restoration maps and the BNSF Crossing Surface Installation Agreement into the Contract Specifications.
2. Please add the following to SP-9 (1702) Permits, Licenses, and Taxes:
“Contractor will be required to execute Exhibit C-1 Agreement Between BNSF Railway Company and the Contractor, and comply with all applicable requirements prior to issuing the Notice to Proceed. The one exception to this is that the City of Duluth will hire and pay for a contractor to perform the traffic control for the two crossings.”
3. Please add the following to SP-18 (2211) Aggregate Base-Quality Compaction:
“BNSF has already completed their work at the Fremont Street sidewalk crossing and restored the removed pavement with aggregate base. Both crossing restorations shall be compacted in accordance with MnDOT 2106.3G2, Quality Compaction.”
4. Please add the following to SP-21 (2360) Plant Mixed Asphalt Pavement-Street Restoration patching: “This work also includes the placement of bituminous along each side of each of the concrete pads for the railroad crossings. Minimum width of the patch area is 5 feet, but will depend on the disturbance done by BNSF. Contractor shall coordinate the work with Duncan Schwensohn, city of Duluth Senior Project Engineer to coordinate work schedules with BNSF. At least 7 working days notice is required prior to construction in order to provide road closure notifications.”
5. The bid form has been adjusted to reflect the estimated increase in quantities shown on the maps attached to Appendix C for the bid items listed below:

2104.503 Sawing Bituminous Pavement 60 Lin Ft for a total bid quantity of 532 Lin Ft

2104.518 Remove Bituminous Pavement 295 Sq Ft for a total bid quantity of 460 Sq Ft.

2104.518 Remove Concrete Sidewalk 53 Sq Ft for a total bid quantity of 4116.5 Sq Ft.

2360.604 Bituminous Patch 6.0” Thick 38 Sq Yd for a total bid quantity of 68 Sq Yd


2521.518 6” Concrete Walk 102 Sq Ft for a total bid quantity of 356 Sq Ft

Please acknowledge receipt of this Addendum by checking the acknowledgement box within the www.bidexpress.com solicitation.

Posted: **February 27, 2025**

SPECIAL PROVISIONS
City Job Number: 2238
2025 Citywide Patch and Sidewalk
February 14, 2025

APPENDIX C
RAIL CROSSING RESTORATION

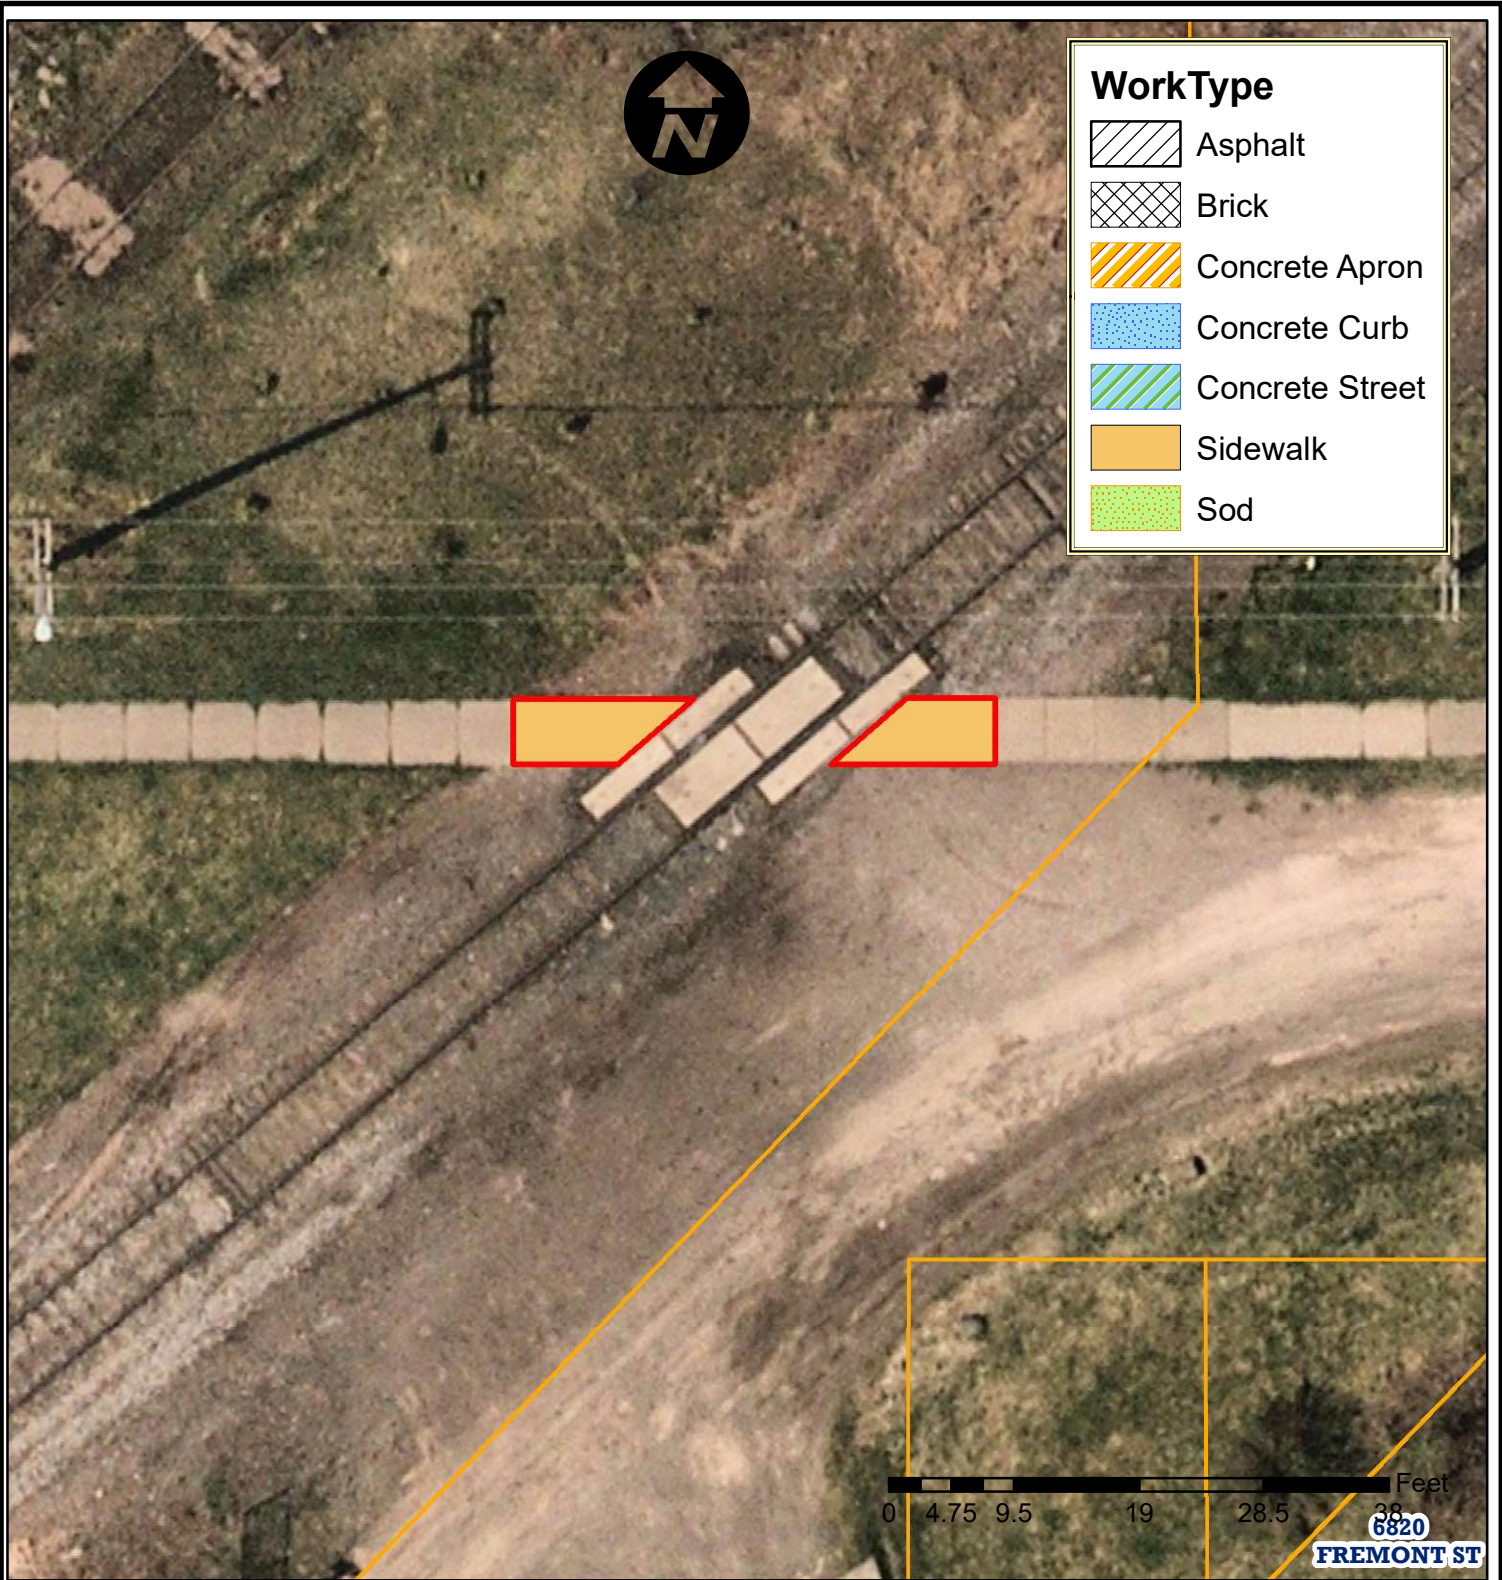


Location Fremont St RR Crossing

EAM Work Order

Excavation Type

Date Completed _____

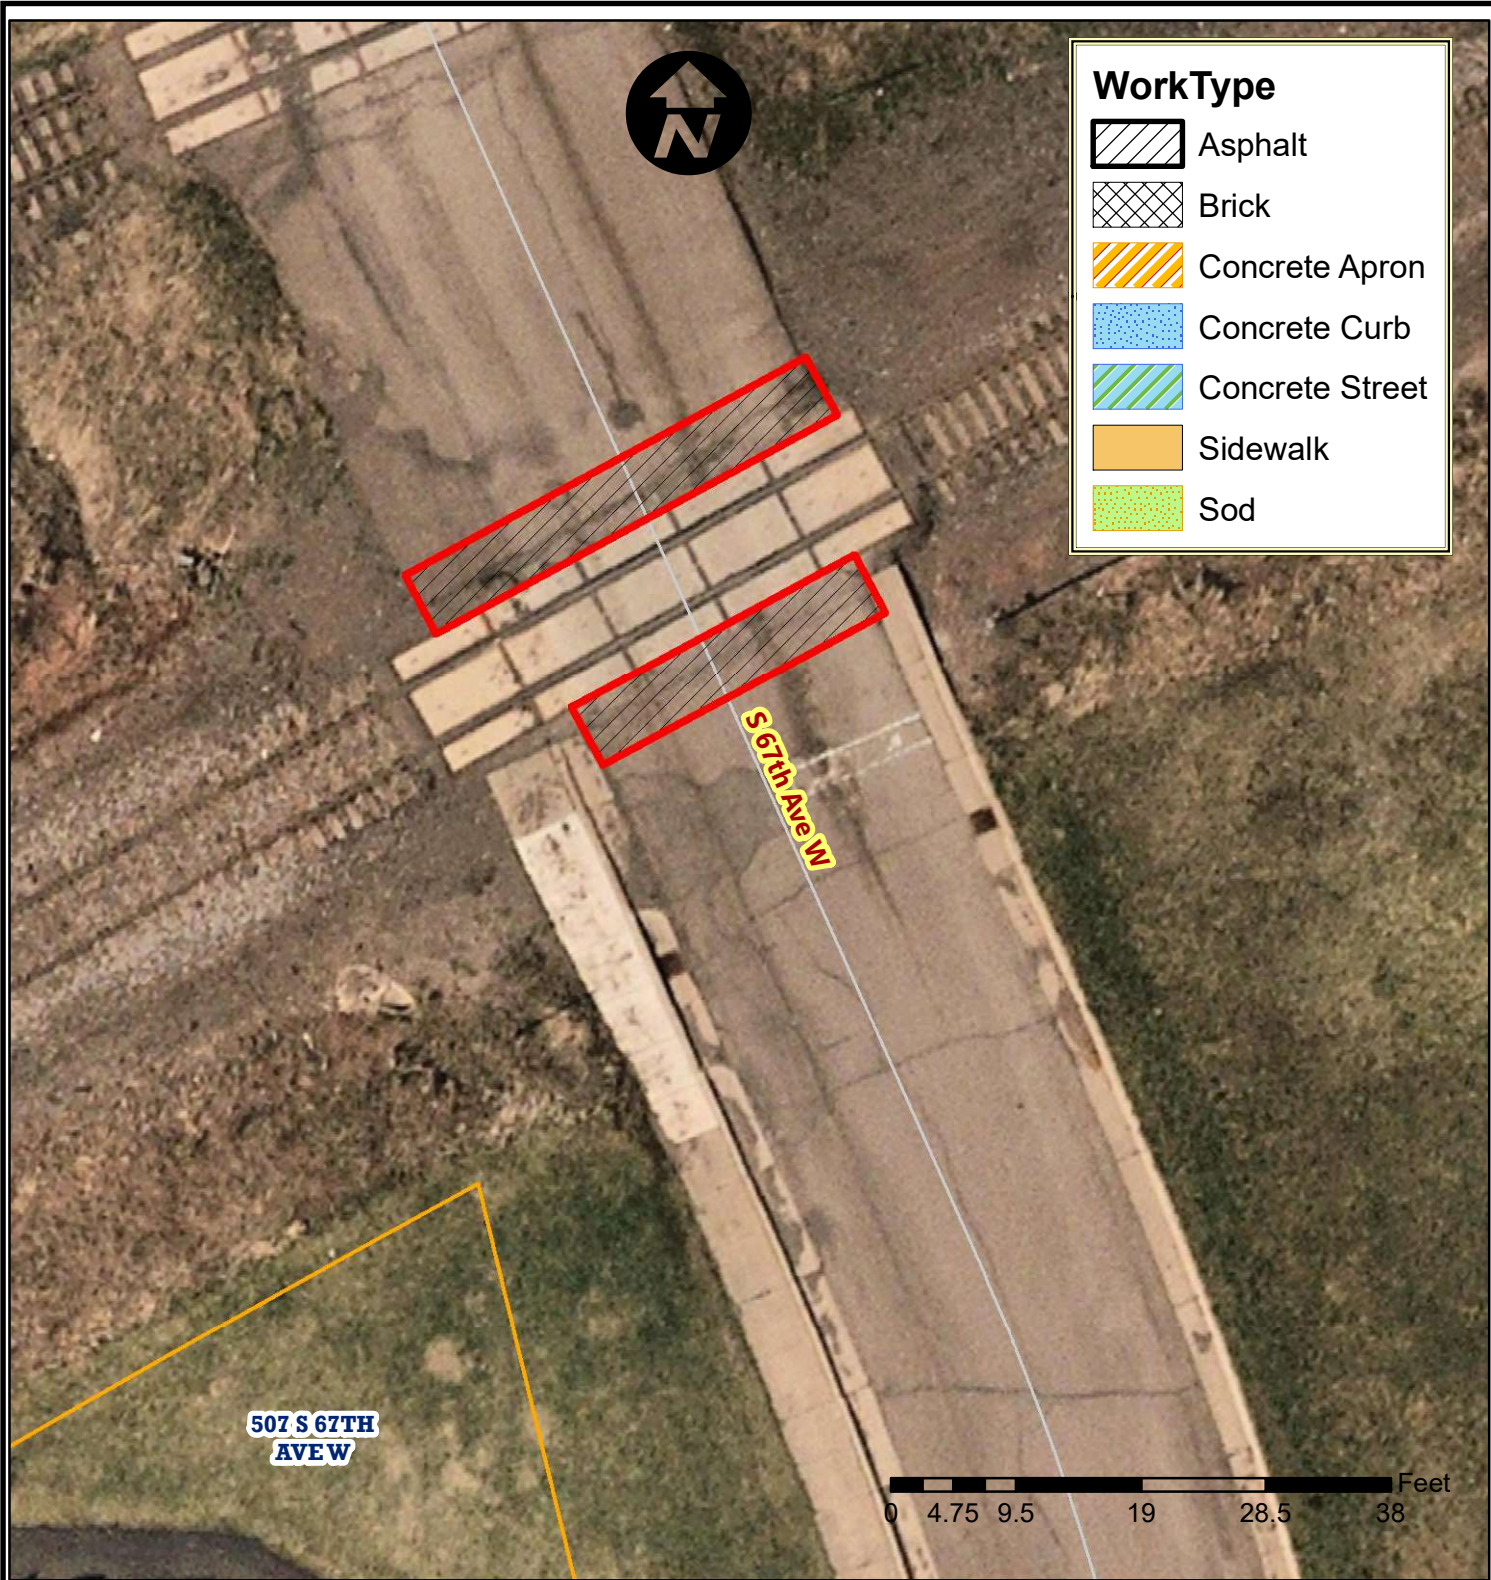

Location S 67th Ave W RR Crossing

EAM Work Order

Excavation Type

Date Completed _____